




TECHNICAL SPECIFICATIONS

PJP PLANT HIRE

C30R2

Operating weight : 2365 kg

Max. Payload : 2500 kg

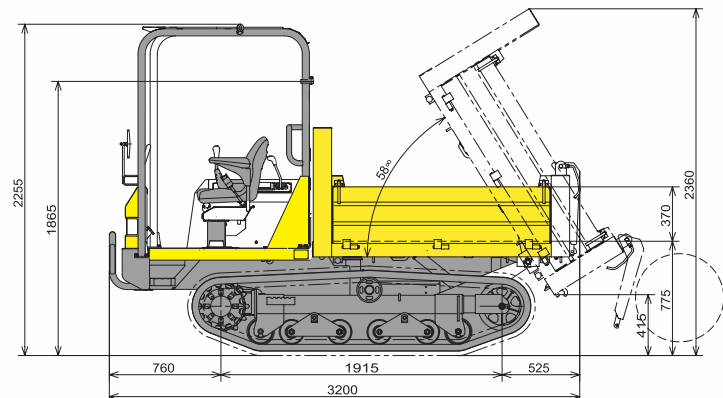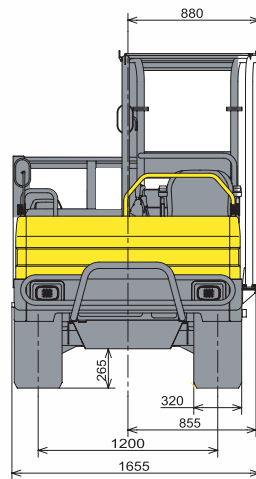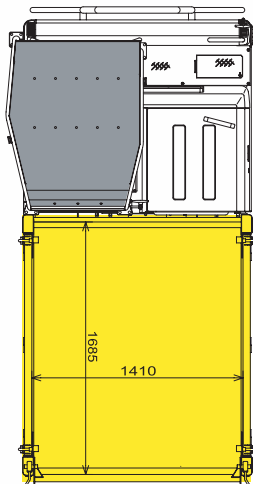

Subject to any technical modifications. Dimensions given in mm.

		C30R-2A
Yanmar Diesel 3 cylinders engine	Operating weight	2365 kg
	Type	3TNV88-SFW
	Rated Output	19.1 kw / 26 HP / 2200 rpm
	Displacement	1642 cm ³
	Cooling system	Water
Undercarriage	Max. torque	107.9 N.m. / 1320 rpm
	Track width	320 mm
	Min. ground clearance	265 mm
	Ground pressure (unloaded)	0.27 kg/cm ²
Performance	Ground pressure (loaded)	0.57 kg/cm ²
	Max. Payload	2500 kg
	Dumping angle	58°
	Vessel dimensions (L x W x H)	1685 x 1410 x 370 mm
	Dumping mechanism	1 side
	Dump clearance	415 mm
	Dump vessel capacity (struck/heaped)	0.88 / 1.24 m ³
	Grade ability	30°
	Max. Travelling speed (forward)	0 - 8.2 km/h
	Max. Travelling speed (reverse)	0 - 8.2 km/h
Miscellaneous	Transmission	Hydraulic engine with gear
	Hydraulic tank	13 l
	Hydraulic system	18 l
	Fuel tank	40 l
	Brake	Wet multiple disk brake
	Acoustic pressure LwA (2000/14/EC & 2005/88/EC)	100 dBA*

* provisory data